


# 卧式AC SSR(单LED指示系列) AC SSR of Horizontal Type ( Single LED light)

产品认证  E256552 R50242231



主要技术参数 Main parameters	产品型号 Type	SAP4805D* SAP4820D*	SAP4810D* SAP4825D	SAP4815D* SAP4840D	SAP4850D SAP4880D	SAP4860D SAP4890D	SAP4870D SAP48100D*						
负载电压 Load voltage	40-530VAC												
负载最大电流 Max Load current	SSR	5A	10A	15A	20A	25A	40A	SSR	50A	60A	80A	90A	100A
内部器件设计电流	Triac	12A	16A	24A	26A	41A	50A	Double RC	60A	80A	90A	100A	110A
隔离电压 Isolation bet.In & out	输入输出光电隔离 $\geq 2500VAC$ 1min												
绝缘电压 Isolation to case	$\geq 3000VAC$ 1min												
控制电压 Control voltage	3-32V DC												
控制电流 Control current	6-12mA ( 内置恒流电路 )												
通态压降 Turn-on voltage	$\leq 1.3VAC$												
断态漏电流 off-state leakage	$\leq 3mA$												
电压上升率 off-state dv/dt	500v/ $\mu s$												
通断时间 on or off time	过零型Zero-crossing: 10ms												
频率范围 Frequenty range	45/65Hz												
动作状态指示 Status indicator	单LED指示												
工作环境温度 Operating temperature	-40 ~ 80°C												

外形尺寸 Dimentions:

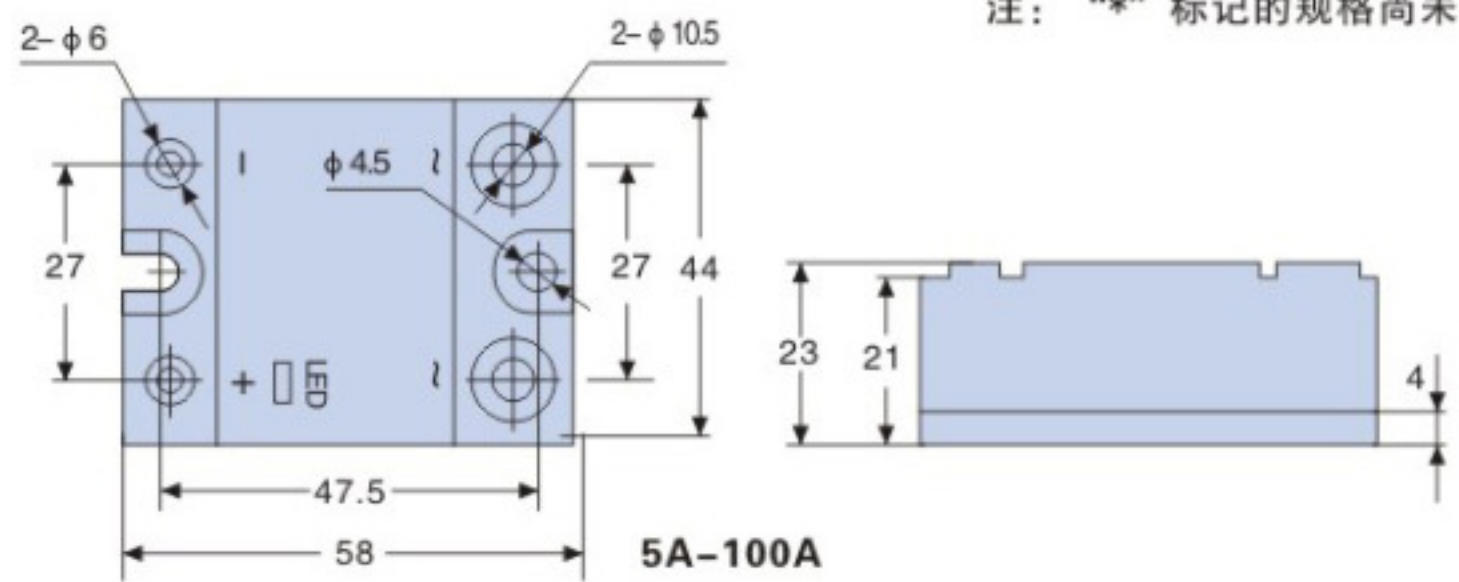

注：“\*” 标记的规格尚未获得UL认证

备注-例: SAP48xxD

控制信号可选择:

尾缀D表示:3-32V

尾缀A表示:90-280V AC

尾缀B表示:40-140V AC(该类型主要应用于北美)

控制信号不同, 其他参数不变。